

8+2 CCTV Full Gigabit PoE Switch

802.3af/at 、 6kv Lightning、 VLAN


VP-0802FG



- Main Ports: 8x1000 Mbs downlink Ports ;
- Main Ports: 2x1000Mbs uplink Ports;
- Protection:Superior lightning protection(6KV);
- Bandwidth: 20 Gbps(No block)
- Operation:plug and play, no any settings needed.



Application

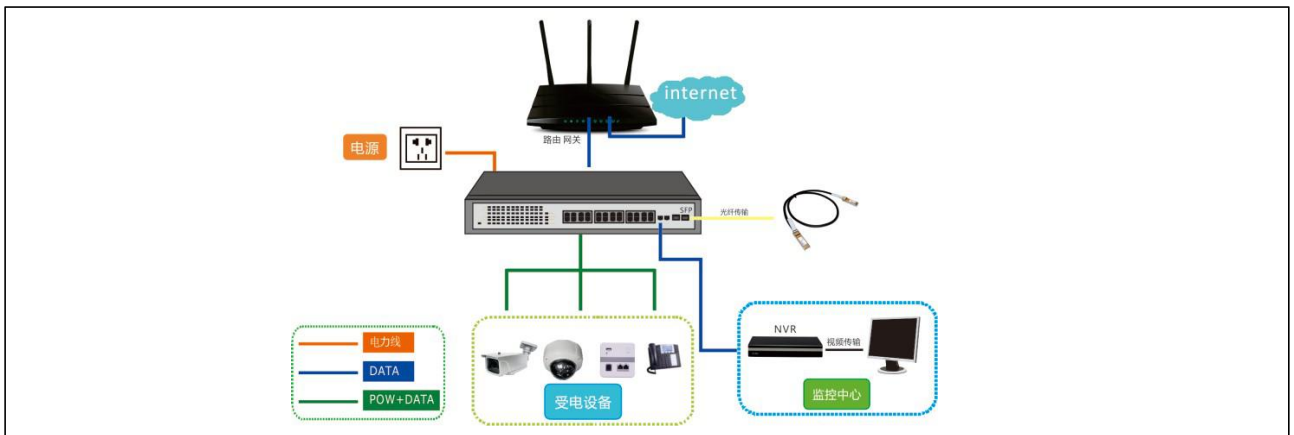

Indicator Status

Indicator	Indicator Description	Normal Status	Abnormal Status
Powerlight	Power Indicator	Green ok	If the light is not ok, Please check external socket power supply if it is normal/adaptor power connection if is correct or not etc..
LINK/ACT Indicator	LINK :Devices connected yet ACT: Data exchange	Green is ok/ blinking	If the light is not ok. Please check the corresponding RJ45 port if connected network devices,POE power normal, cable connected correctly, cable damaged, network devices destroyed or not etc..

Specification

Model	VP-0802FG
Downstream Ports	8*10/1000Base-TX (PoE)
Uplink Ports	2*10/100/1000Base-TX
Network Standard	IEEE802.3、IEEE802.3u、IEEE802.3X
Switch Capacity	20Gbps
Memory Buffer	4.1MB
MAC Table	4K
PoE Standard	802.3af/at
Power Pin Assignment	12(+), 36(-)
PoE Power Output	15.4 watts
Total power	96 watts(POE Ports:1~8)
Lightning protection	6KV
Frame filtering and transmission rate	10M: 14,800pps/100M: 148800pps/1000M : 1488095pps
Power Supply	48V/2A
Work temperature	0°C~55°C
Storage temperature	-20°C~70°C
Humidity(Non-condensin)	10%-90%
Dimension (L×W×H)	184mm×94mm×27mm
Weight	1.3kg
Regulator	CE、FCC、BIS

Package List

Designation	Quantity
VP-0802FG	1
Power Adapter	1
Accessory	1
User Manual	1