

# 24+2 CCTV Full Gigabit PoE Switch

802.3af/at , 6kv Lightning, VLAN

## VP-2402FG



- Main Ports: 24x1000Mbs downlink Ports ;
- Main Ports: 2 Gigabit SFP uplink Ports;
- Protection:Superior lightning protection(6KV);
- Bandwidth: 48 Gbps(No block)
- Operation:plug and play, no any settings needed.




## Back Panel



1. Power Socket
2. Power Switch
3. Ground Terminal

## Application

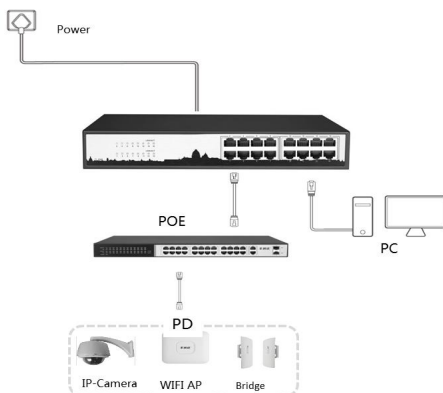

## Indicator Status

Indicators	Title	Color	Work status	Description
POWER	Power indicator	Red	Solid	Power is normal
			Off	No power, the power switch is not turned on, power supply is abnormal
POE	POE power indicator	Yellow	Solid	The corresponding RJ45 port is connected to the powered device and the power supply is normal
			Off	The corresponding RJ45 port is not connected to the powered device or the power supply is abnormal
LINK/ACT	Connection indicator	Green	Blinking	A valid link is established
			Off	An invalid link is established

## Specification

Model	VP-2402FG
Downstream Ports	24*10/100/1000 Base-TX (PoE)
Uplink Ports	2 Gigabit SFP Ports
Network Standard	IEEE802.3、IEEE802.3u、IEEE802.3X
Switch Capacity	48Gbps
Memory Buffer	4.1Mb
MAC Table	8k
PoE Standard	802.3af/at
Power Pin Assignment	12(+) 36(-)
PoE Power Output	15.4 watts
Total power	250 watts(PoE Ports:1~24)
Lightning protection	6KV
Frame filtering and transmission rate	10M : 14,880pps/100M : 148800pps/1000M : 1488095pps
Power Supply	250W built-in-power Adaptor
Work temperature	0°C~55°C
Storage temperature	-20°C~70°C
Humidity(Non-condensin)	10%-90%
Dimension (L×W×H)	440mm×270mm×44mm
Weight	2.1kg
Regulator	CE、FCC

## Package List

Commodity	Quantity	Description
PoE switch	1pcs	VP-2402FG
Power cord	1pcs	Optional
Bracket	2pcs	Fixed on rack mount
User manual	1pcs	Guide users to install switch